


**Straight
TEE**
同徑三通

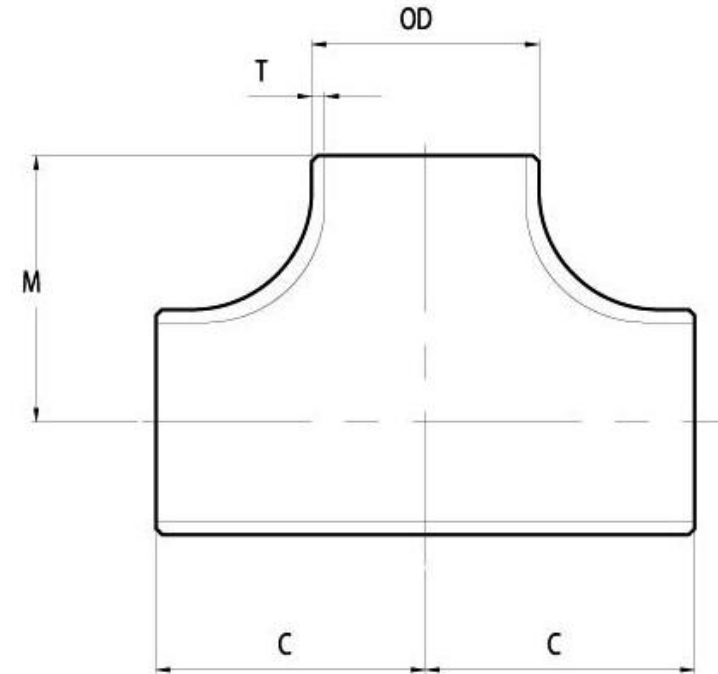

| DIMENSIONS | | | | | | | (unit: inch / mm) |
|-------------------|-------------------|-------------------|----------|----------|----------|-------------------|-------------------|
| Nominal Pipe Size | Outside Dia. (OD) | Wall Thickness(T) | | | | Center to END C,M | |
| | | Sch. 5S | Sch. 10S | Sch. 40S | Sch. 80S | | |
| 1/2 | 0.840 | 0.065 | 0.083 | 0.109 | 0.147 | 1.000 | |
| | 21.336 | 1.651 | 2.108 | 2.769 | 3.734 | 25.400 | |
| 3/4 | 1.050 | 0.065 | 0.083 | 0.113 | 0.154 | 1.130 | |
| | 26.670 | 1.651 | 2.108 | 2.870 | 3.912 | 28.702 | |
| 1 | 1.315 | 0.065 | 0.109 | 0.133 | 0.179 | 1.500 | |
| | 33.401 | 1.651 | 2.769 | 3.378 | 4.547 | 38.100 | |
| 1.1/4 | 1.660 | 0.065 | 0.109 | 0.140 | 0.191 | 1.880 | |
| | 42.164 | 1.651 | 2.769 | 3.556 | 4.851 | 47.752 | |
| 1.1/2 | 1.900 | 0.065 | 0.109 | 0.145 | 0.200 | 2.250 | |
| | 48.260 | 1.651 | 2.769 | 3.683 | 5.080 | 57.150 | |

| WEIGHTS | | | | | (unit: kg) |
|-------------------|---------|----------|----------|---------|------------|
| Nominal Pipe Size | Sch. 5S | Sch. 10S | Sch. 40S | Sch.80S | |
| 1/2 | 0.051 | 0.065 | 0.083 | 0.106 | |
| 3/4 | 0.072 | 0.092 | 0.111 | 0.159 | |
| 1 | 0.12 | 0.204 | 0.244 | 0.316 | |
| 1.1/4 | 0.193 | 0.327 | 0.412 | 0.543 | |
| 1.1/2 | 0.27 | 0.457 | 0.596 | 0.797 | |

| | | | | | | |
|-------|---------|-------|-------|-------|--------|---------|
| 2 | 2.375 | 0.065 | 0.109 | 0.154 | 0.218 | 2.500 |
| | 60.325 | 1.651 | 2.769 | 3.912 | 5.537 | 63.500 |
| 2.1/2 | 2.875 | 0.083 | 0.120 | 0.203 | 0.276 | 3.000 |
| | 73.025 | 2.108 | 3.048 | 5.156 | 7.010 | 76.200 |
| 3 | 3.500 | 0.083 | 0.120 | 0.216 | 0.300 | 3.380 |
| | 88.900 | 2.108 | 3.048 | 5.486 | 7.620 | 85.852 |
| 4 | 4.500 | 0.083 | 0.120 | 0.237 | 0.337 | 4.130 |
| | 114.300 | 2.108 | 3.048 | 6.020 | 8.560 | 104.902 |
| 5 | 5.563 | 0.109 | 0.134 | 0.258 | 0.375 | 4.880 |
| | 141.300 | 2.769 | 3.404 | 6.553 | 9.525 | 123.952 |
| 6 | 6.625 | 0.109 | 0.134 | 0.280 | 0.432 | 5.630 |
| | 168.275 | 2.769 | 3.404 | 7.112 | 10.973 | 143.002 |
| 8 | 8.625 | 0.109 | 0.148 | 0.322 | 0.500 | 7.000 |
| | 219.075 | 2.769 | 3.759 | 8.179 | 12.700 | 177.800 |
| 10 | 10.750 | 0.134 | 0.165 | 0.365 | 0.500 | 8.500 |
| | 273.050 | 3.404 | 4.191 | 9.271 | 12.700 | 215.900 |
| 12 | 12.750 | 0.156 | 0.180 | 0.375 | 0.500 | 10.000 |
| | 323.850 | 3.962 | 4.572 | 9.525 | 12.700 | 254.000 |
| 14 | 14.000 | 0.156 | 0.188 | 0.375 | 0.500 | 11.000 |
| | 355.600 | 3.962 | 4.775 | 9.525 | 12.700 | 279.400 |
| 16 | 16.000 | 0.165 | 0.188 | 0.375 | 0.500 | 12.000 |
| | 406.400 | 4.191 | 4.775 | 9.525 | 12.700 | 304.800 |
| 18 | 18.000 | 0.165 | 0.188 | 0.375 | 0.500 | 13.500 |
| | 457.200 | 4.191 | 4.775 | 9.525 | 12.700 | 342.900 |
| 20 | 20.000 | 0.188 | 0.218 | 0.375 | 0.500 | 15.000 |
| | 508.000 | 4.775 | 5.537 | 9.525 | 12.700 | 381.000 |
| 22 | 22.000 | 0.188 | 0.218 | 0.375 | 0.500 | 16.500 |
| | 558.800 | 4.775 | 5.537 | 9.525 | 12.700 | 419.100 |
| 24 | 24.000 | 0.218 | 0.250 | 0.375 | 0.500 | 17.000 |
| | 609.600 | 5.537 | 6.350 | 9.525 | 12.700 | 431.800 |

| | | | | |
|-------|-------|--------|-------|------|
| 2 | 0.371 | 0.630 | 0.872 | 1.2 |
| 2.1/2 | 0.71 | 1.010 | 1.66 | 2.19 |
| 3 | 0.96 | 1.370 | 1.9 | 3.25 |
| 4 | 1.51 | 2.150 | 4.13 | 5.74 |
| 5 | 2.87 | 3.480 | 6.55 | 9.31 |
| 6 | 3.92 | 4.760 | 9.73 | 12.8 |
| 8 | 5.92 | 8.460 | 18 | 27.4 |
| 10 | 12.07 | 14.200 | 30.8 | 41.7 |
| 12 | 19.2 | 21.600 | 44.3 | 58.4 |
| 14 | 27.75 | 27.3 | 53.7 | 70.9 |
| 16 | 29.4 | 33.6 | 66.3 | 87.7 |
| 18 | 41.39 | 47.3 | 84.1 | 111 |
| 20 | 53.24 | 61 | 104 | 138 |
| 22 | 64.41 | 73.8 | 126 | 167 |
| 24 | 80.35 | 93.5 | 140 | 185 |



大甲永和機械工業股份有限公司

Add : 台中市大甲區幼獅路69號

Tel : 886-4-2681-5496

Tachia Yung Ho Machine Industry Co., Ltd

No.69, Youshi Rd., Dajia Dist., Taichung City 437, Taiwan

Fax : 886-4-2681-5456 Web : www.yhmc.com.tw